



Garage Door Banners

Product Parts

- 1** - Top Clamp
(x4 single door),(x6 double door*)
- 2** - Top Clamp Connector
(x4 single door),(x6 double door*)
- 3** - Bottom Tension Clamp
(x4 single door),(x6 double door*)
- 4** - Screws/Nuts
(x8 single door),(x12 double door*)
- 5** - Garage Door Banner Graphic

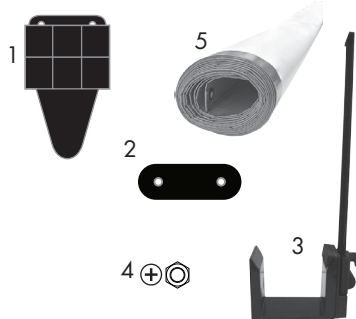


*Amount is doubled for a Split Double Garage Door and varies for custom sizes.

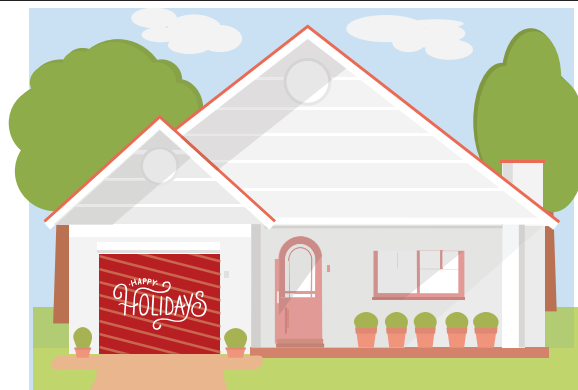

Display Set-Up

Step 1

Unroll Graphic (5) and locate pre-drilled holes along top of the Graphic (5). Place the Graphic (5) over Top Clamp (1) and feed two Screws (4) through Top Clamp Connector (2) and hole on Graphic (5) then into nut on the back of the Top Clamp (1). Repeat for remaining Top Clamps.

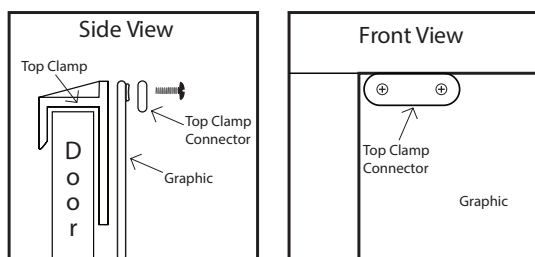

Step 3

Attach the Bottom Tension Clamps (3), evenly spaced, along bottom of the garage door.



Step 5

Reconnect power and remove blocking. Resume normal operation of garage door.



Step 2

Raise garage 6" to 12" to allow for easier access to clamps.



WARNING: Disconnect power and block door to prevent accidental closing. Placing of Graphic and hardware requires a minimum of 2 people.


Place Top Clamps (1), evenly spaced, along top of garage door.

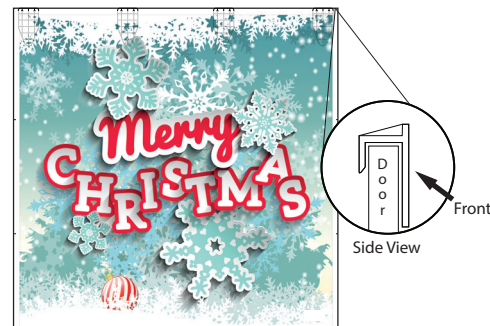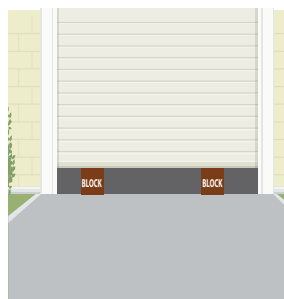

Step 4

Feed hook on Bottom Tension Clamp (3) through hole on Graphic (5)

Optional: Cut slit in graphic to allow for garage door handle.

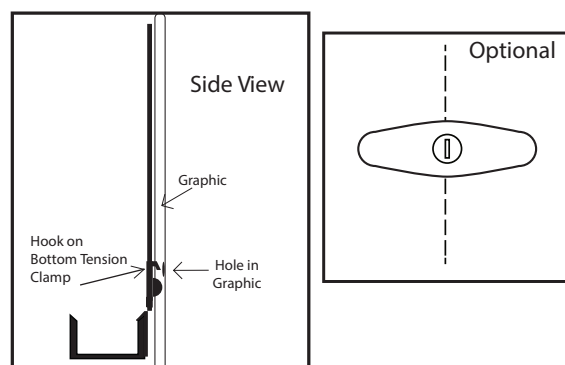

Storage & Care

Store in a cool dry location.

Vinyl: Spot clean with damp cloth.