



---

## Single Gaming Pneumatic Monitor - Blue LED Lights

Instruction Manual



**SKU: STAND-GM1BB**



Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.

<https://vivo-us.com/products/stand-gm1bb>

---

GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST



help@vivo-us.com



www.vivo-us.com  
*Chat live with an agent!*



309-278-5303

**WARNING!**

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.

**WARNING: CHOKING HAZARD**

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.

**PACKAGE CONTENTS**



**A (x1)**  
Arm



**B (x1)**  
Base Cover



**C (x1)**  
Clamp



**D (x1)**  
VESA Plate



**E (x1)**  
LED Power Cable



**F (x1)**  
M4x10 Bolt



**G (x1)**  
3mm Allen Wrench



**H (x1)**  
5mm Allen Wrench



**M-A (x4)**  
M4x12



**M-B (x4)**  
M4x30



**M-C (x4)**  
Spacer

**TOOLS NEEDED**

**NOTE: SOME HARDWARE MAY NOT BE USED**



**DO NOT EXCEED WEIGHT CAPACITY.**  
Failure to do so may result in serious injury.




**PER SCREEN**

**ASSEMBLY STEPS**

**STEP 1**


**OPTION A: 15 - 60mm Desk**

Loosen the hand bolt on the clamp (C) to fit the desk thickness. Place the clamp on the desk edge and tighten, then press the base cover (B) over the top of the clamp.

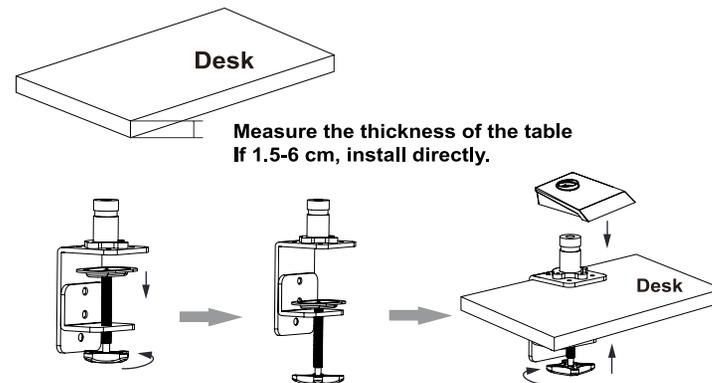

**OPTION B: 60 - 90mm Desk**


If the desk thickness is greater than 60mm (2.36"), remove the two bolts from the back of the clamp (C) using the 5mm Allen wrench (H). Reattach the clamp to the lower portion of the clamp base. Loosen the hand bolt on the clamp to fit the desk thickness. Place the clamp on the desk edge and tighten, then press the base cover (B) over the top of the clamp.

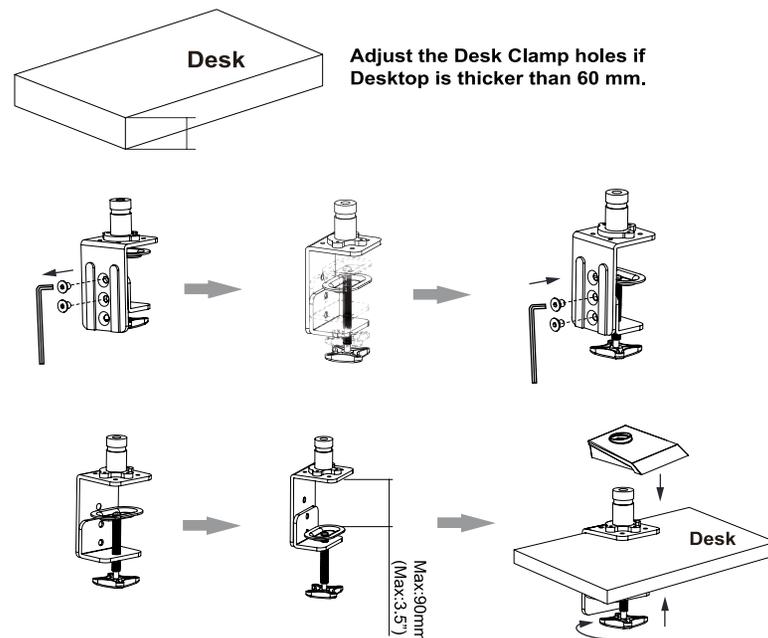

**Do not overtighten screw!**

## STEP 2


Place the arm (A) on top of the base (C), then tighten the screw on the back of the arm using the 3mm Allen wrench (G). Swivel tension may also be adjusted using this screw.

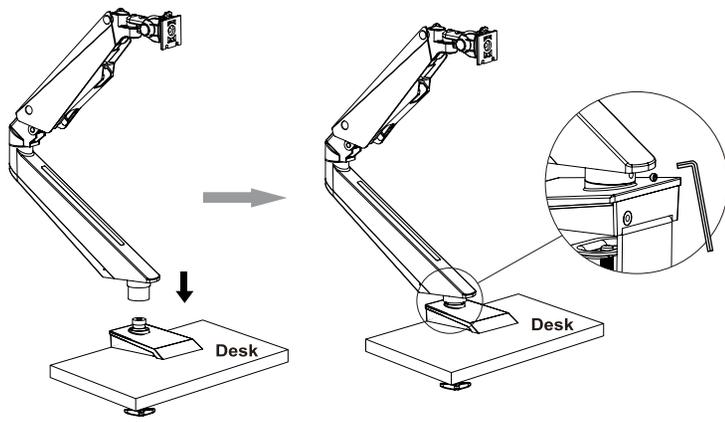

## STEP 3 (Continued)

### OPTION B: Curved Screen Monitors


Attach the VESA plate (D) to the monitor using M4x30 bolts (M-B) and spacers (M-C), making sure the opening is facing towards the bottom of the monitor, and tighten with a Phillips screwdriver.

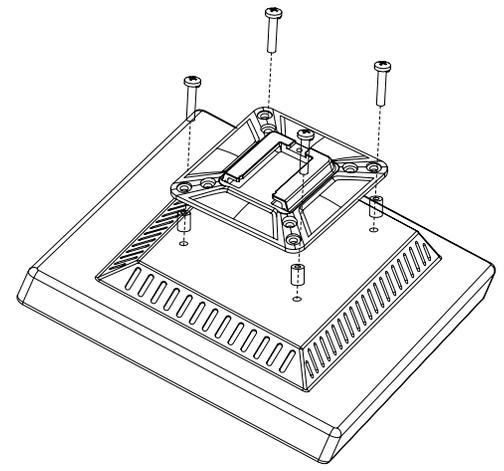

## STEP 3


### OPTION A: Flat Screen Monitors

Attach the VESA plate (D) to the monitor using M4x12 bolts (M-A), making sure the opening is facing towards the bottom of the monitor, and tighten with a Phillips screwdriver.

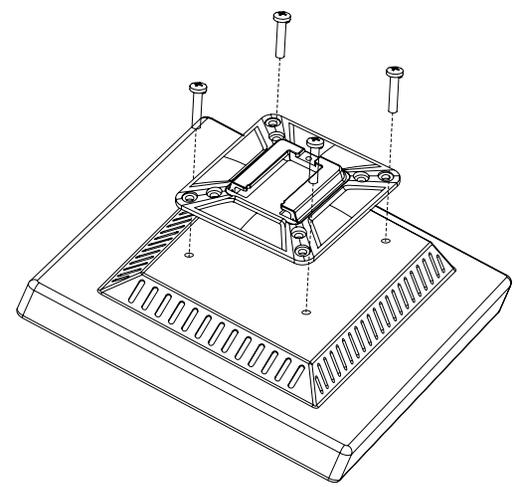




## STEP 4

Slide the monitor with VESA plate (D) onto the head of the arm (A), and secure using the M4x10 bolt (F) with a Phillips screwdriver.

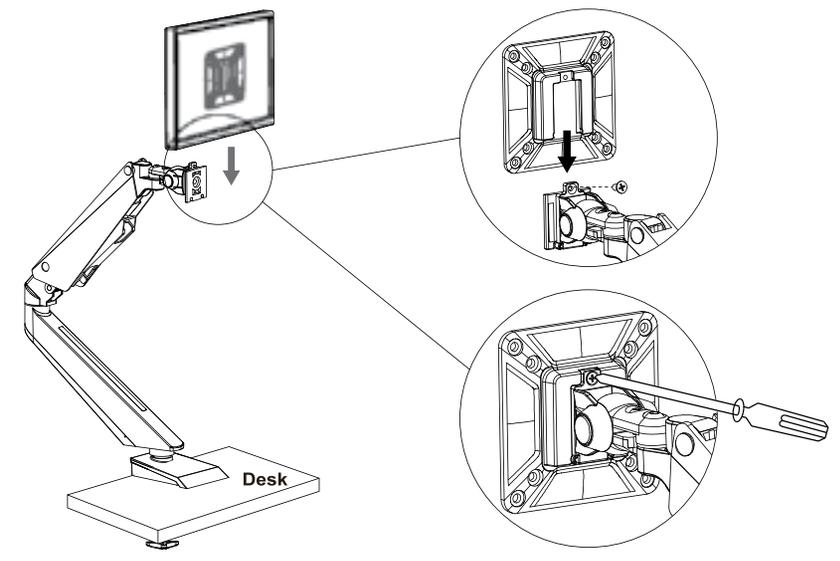


## STEP 5

If needed, adjust the gas spring in the arm (**A**) to support the monitor using the 5mm Allen wrench (**H**). While holding the arm in the straight forward position, turn the screw in back clockwise to decrease support, and counter-clockwise to increase. Adjust the tilt support by turning the bolt immediately behind the tilt joint, and the swivel by turning the bolt on the back of the bracket.

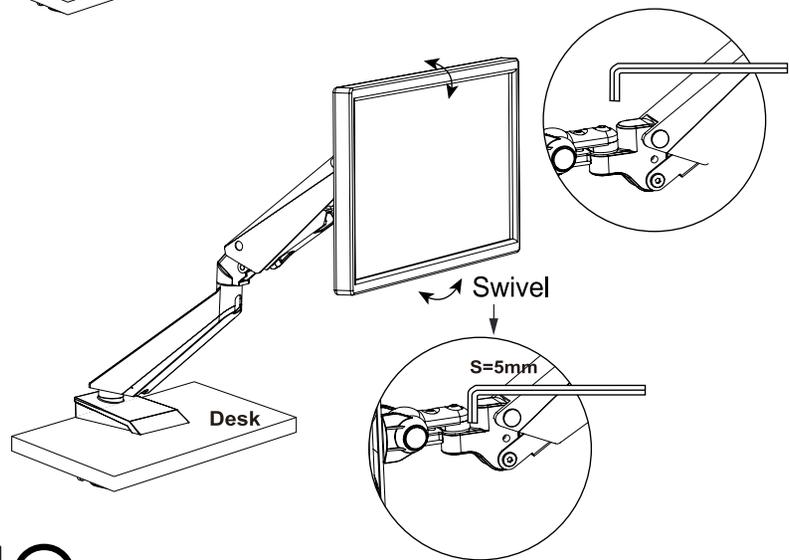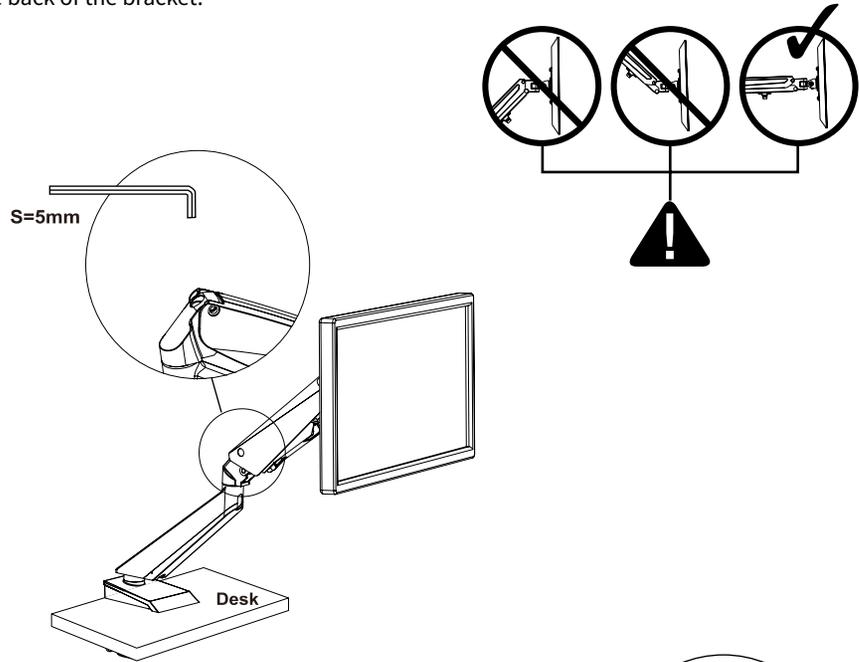


## STEP 6

Remove the cable covers from the arm (**A**) by sliding each one forward and off (*loosen screws for upper cover if needed*). Run cables through the upper cover and lower arm, then reinstall the covers.

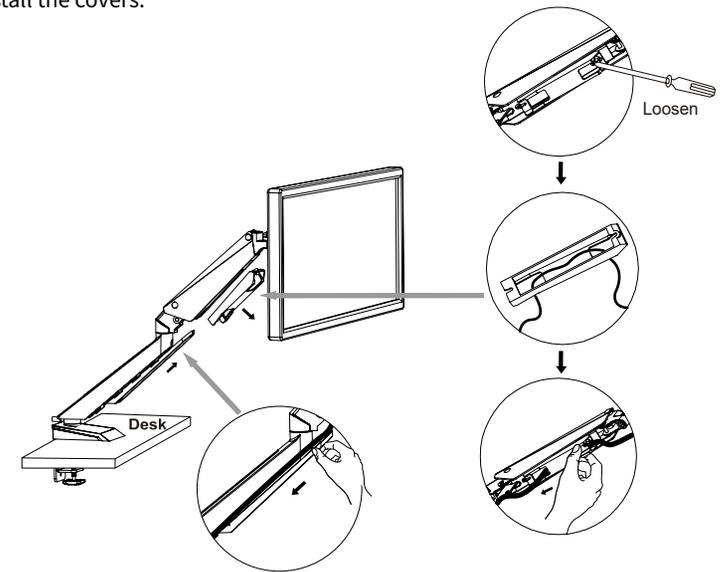

## STEP 7

Plug the LED power cable (**E**) into the connectors on the back of the arm (**A**) and base cover (**B**), then connect to a USB port on the computer to power on.

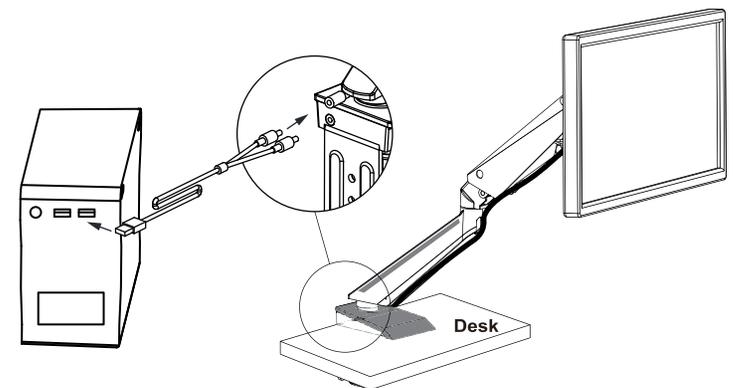



Love your new VIVO setup and want to share?  
Tag us in your photo! **@vivo\_us**

LAST UPDATED: 03/05/2020



Open **Monday - Friday 7:00am - 7:00pm** CST,

our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us. We are happy to replace parts to ensure you have a fully functioning product.



[help@vivo-us.com](mailto:help@vivo-us.com)

**AVG. RESPONSE TIME** (*within office hrs*): **1HR 8M**

- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr



[www.vivo-us.com](http://www.vivo-us.com)  
*Chat live with an agent!*

**AVG. RESOLUTION TIME** (*within office hrs*): **< 15 M**



309-278-5303

**AVG. RESOLUTION TIME** (*within office hrs*): **5M 4S**

FOR MORE VIVO PRODUCTS, CHECK OUT OUR WEBSITE AT: [www.vivo-us.com](http://www.vivo-us.com)