












# Assembly Instruction--Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	Left Back Legs		1
P3	Right Back Legs		1
P4	CHAIR		1
P5	SEAT CUSHION		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*2-3/8"		6
H2	Lock Washers φ5/16"		6
H3	Flat Washers φ5/16"		6
H4	Allen Wrench φ5/16"		1
H5	Plastic washer		2

1. Turn the chair upside down and lay on protective carpet, take out the legs and hardwares from package.



2. Use Allen wrench(H4), Bolt(H1), Lock washer(H2), Flat washer(H3) to connect Left Back Legs(P2) and Right Back Legs(P3) to chair (P4). Screw in the front legs(P1) into the screw holes underneath the base by using plastic washer (H5).

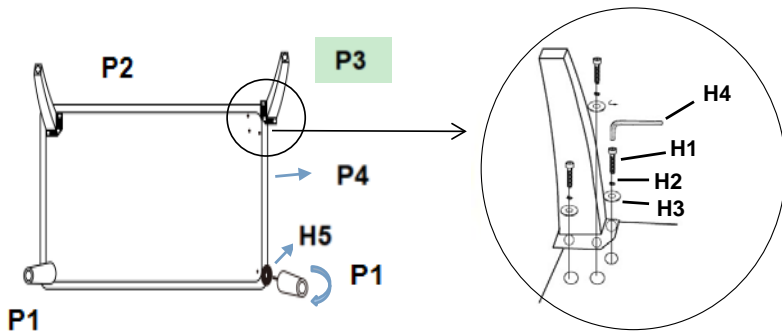

3. Place chair upright on a level surface, put seat cushion(P5) on it. Assembly is complete.

