

### INSTRUCTION MANUAL

#### Safety Warnings

These products are only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring Regulations and should be installed in accordance to local UK Building Regulations and are for Domestic ceiling use only and not suitable for a Bathroom location.

The light fitting should be connected to a lighting circuit protected by a 5 amp fuse (or a 6 amp miniature circuit breaker).

If in doubt we recommend you contact a qualified electrician. Before installing your light fitting always:

Switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.

Ensure that no one else has access that would enable the supply to be inadvertently reconnected.

This product contains glass parts – be careful during handling and maintenance to avoid breakage.

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

This fitting is heavy / awkward and you may require assistance in connecting it to the supply and securing it to the mounting surface. When fixing to the mounting surface ensure that the fixings used are appropriate for the mounting surface on which they are being used.

If any modification is made it will invalidate the warranty and may render the product unsafe.

#### Before you start

**Please read these instructions carefully before fitting your new light and retain for reference.**

**Make sure that there are no pipes or cables beneath the mounting surface.**

Check the packaging and make sure that you have all the required parts.

Follow each assembly step in order to prevent incorrect assembly.

Make sure all screws / nuts, including electrical connections etc are fully tightened before use.

**We recommend that this type of Light Fitting is not connected to a Dimmer.**

#### **The Light pack contains:**

Adjustable Light fitting.

Terminal connection block(s).

#### **The following tools may be required:**

Selection of cross and flat head screwdrivers.

Electric drill and assorted drill bits.

Wire strippers.

Electrical insulation tape.

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician. The 10 light model is shown here but the same general instruction applies to the 5 light version also.

Diagram A



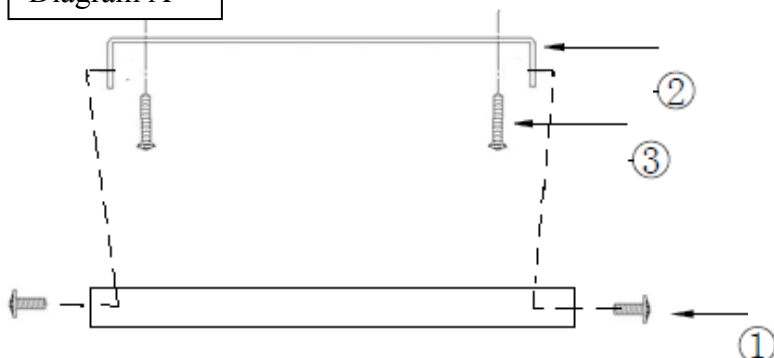


Diagram B

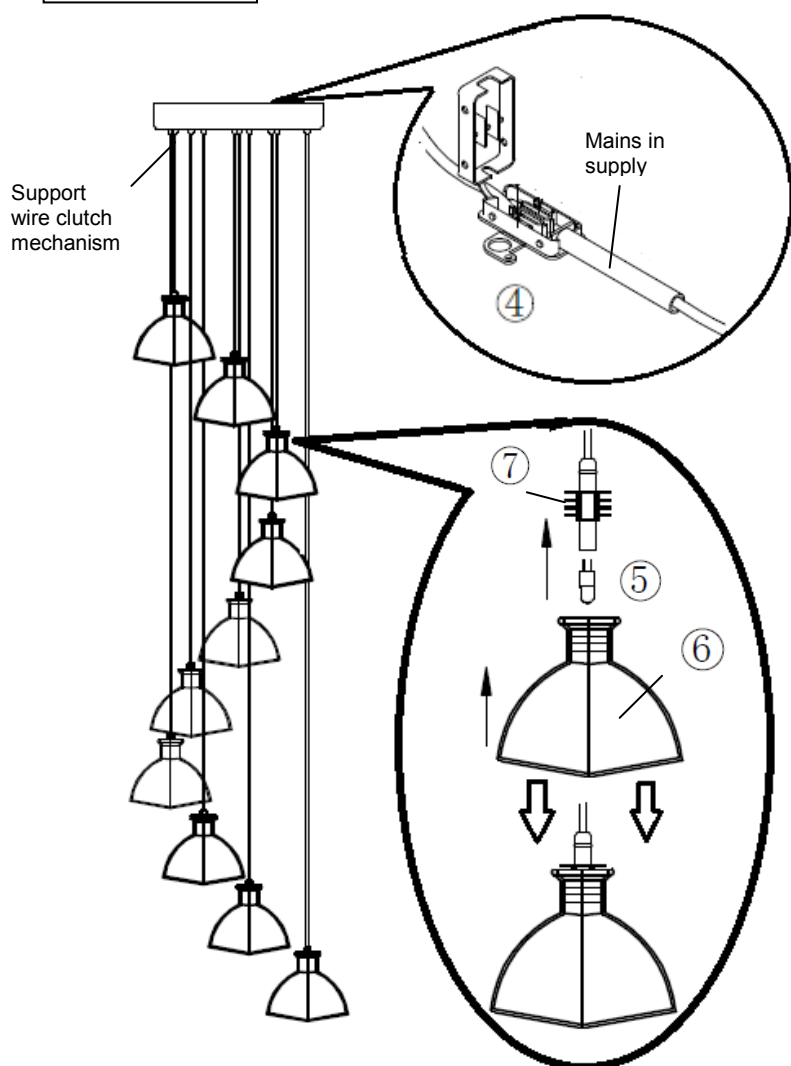

Details of terminal wiring.

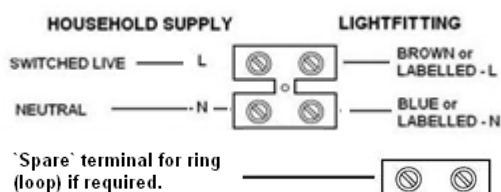

1. Decide on the position of the light fitting / or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light fitting.
2. **Diagram A.** Remove the fixing bracket, by undoing the side screws (1), retain these for re-use.
3. Use the fixing bracket (2) as a template to mark the screw holes, mark the screw holes and secure to the ceiling with the screws (3) supplied.
4. **Diagram B.** The overall length of the fitting may be reduced by shortening the support / power wires. It is essential that this is done before the fitting is mounted to the ceiling and / or connected to the mains supply. To do this, shorten the length of the support wire by pushing up the centre of the support mechanism (which acts as a clutch) and pull / push the wire up and into the ceiling cup. When you reach the desired overall length release the centre clutch – this will then grip the wire. Fold the wire carefully in the ceiling cup void.
5. Support your fitting and connect the house wiring to the terminal block (4) – see also details of terminal wiring. **NOTE: This is a Class II fitting and must not be earthed. If you have any earth cables make sure that they are connected to each other – to maintain earth continuity throughout your property – and wrap the earth terminal and connections in 2 layers of good quality insulation tape and keep them away from the terminal connections of the fitting.** Open the terminal block box and take out the long tailed grommet, sliding it up the mains in supply cable. Cut and strip the cable and connect it to the terminal block as shown. Close the box. The additional single terminal block connector is used for the "loop" wires of the "Ring Circuit". There may be more than one set of cables in the "loop" connections. This additional connector must be wrapped in 2 layers of good quality insulation tape to prevent the conductors touching the main terminal block connections or the metal of the fitting. **If there is a "Ring Circuit" and you do not understand the connections you must consult an electrician.**
6. Secure the fitting back onto the fixing bracket with the side screws (1), removed in 2 above. Make sure that all the internal cables and connections are inside the Ceiling cup taking care not to trap or strain the internal cables.
7. Fit the Capsule bulbs (5) – being careful not to touch them with bare hands – use gloves or a cloth. **NOTE: Never fit bulbs of a higher wattage than those specified on the label (as this may cause overheating and damage the fitting).**
8. Fit the 'shade' (6) and over the bulb and fully onto the top section of the ribbed silicon shade holder.
9. Turn on the power and test.