









The Veranda Solids & Tones collections integrate earthy colors and elemental inspiration like leather, pearls, suede and steel. The wide array of tones that were inspired from both man-made and natural sources serves as the basis for this unique collection.



Solid Field Tile



Tones Field Tile



ZEN GARDEN P530 (COORDINATES WITH PEARL P520, DUNE P527 & SAND P505)




REDLAND HILLS P531 (COORDINATES WITH RAWHIDE P525, RUST P502 & COPPER P526)



URBAN SAFARI P532 (COORDINATES WITH SUEDE P524, GOLD P521 & ZINC P503)




BAMBOO FOREST P533 (COORDINATES WITH GRAVEL P501, LEATHER P506 & PATINA P522)




IRON JUNGLE P534 (COORDINATES WITH GUNMETAL P504, STEEL P500 & TITANIUM P523)














DECO E P514 BORDER (RAWHIDE AND GOLD)







DECO G P516 BORDER (COPPER AND PATINA)



CORNER P515

DECO C CORNER P512

DECO D

DECO E

CORNER P514

CORNER P513

DECO F




DECO G CORNER P516

CREATIVE IDEAS

Decorative Accents **GRAVEL P501** ZINC P503 **RUST P502 GUNMETAL P504 STEEL P500** DECO B CORNER DECO B P511 BORDER **DECO A P510 BORDER** DECO A (GUNMETAL AND STEEL) (GRAVEL, ZINC AND RUST) CORNER P511 P510 **LEATHER P506** SAND P505 **TITANIUM P523** PEARL P520 **RAWHIDE P525** GOLD P521 DECO C P512 BORDER DECO C DECO D P513 BORDER DECO D **DECO E P514 BORDER** DECO E (LEATHER AND SAND) **CORNER** (TITANIUM AND PEARL) **CORNER** (RAWHIDE AND GOLD) **CORNER** P512 P513 P514



Pattern Ideas

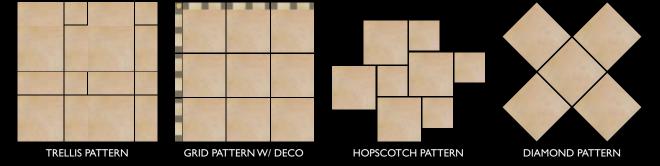



SIZES - SOLIDS*

NOMINAL	ACTUAL	sq.ft. carton	PIECES PER CARTON
20" × 20" Field Tile	19-1/2" x 19-1/2" (49.2 cm x 49.2 cm)	15.51	6
13" x 20" Field Tile	12-7/8" x 19-1/2" (32.8 cm x 49.2 cm)	10.32	6
13" x 13" Field Tile*	12-7/8" x 12-7/8" (32.8 cm x 32.8 cm)	11.44	10
6-1/2" x 20" Field Tile	6-3/8" x 19-1/2" (16.2 cm x 49.2 cm)	10.32	12
6-1/2" x 6-1/2" Field Tile	6-3/8" x 6-3/8" (16.2 cm x 16.2 cm)	9.16	32
3" x 20" Decorative Border	3" x 19-3/4" (7.5 cm x 50.0 cm)		6
3" x 3" Decorative Corner	3" x 3" (7.5 cm x 7.5 cm)		5

SIZES - TONES*

NOMINAL	ACTUAL	SQ.FT. CARTON	PIECES PER CARTON
20" × 20" Field Tile	19-1/2" x 19-1/2" (49.2 cm x 49.2 cm)	15.51	6
13" × 20" Field Tile	12-7/8" x 19-1/2" (32.8 cm x 49.2 cm)	10.32	6
6-1/2" x 20" Field Tile	6-3/8" x 19-1/2" (16.2 cm x 49.2 cm)	10.32	12

LINEAR OPTIONS™ SIZES - SOLIDS*

NOMINAL	ACTUAL	SQ.FT. CARTON	PIECES PER CARTON
3-1/4" x 20" Field Tile	3-1/4" x 19-1/2" (7.96 cm x 49.2 cm)	4.16	10

*Additional linear and rectangular sizes available through Linear Options $^{\text{\tiny{to}}}$ Daltile's linear cutting service. Visit www.daltileproducts.com/linearoptions for sizes and order information.

RESIDENTIAL

RESIDENTIAL USAGE

FLOOR	WALL	COUNTERTOPS EXTERIOR PATIOS EXTERIOR POOL
		DECKS







ΕP



COMMERCIAL

COMMERCIAL APPLICATION

LIGHT COMMERCIAL	COMMERCIAL	COMMERCIAL EXTERIORS
•	•	
•	•	•
•	•	•
•	•	•

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed.

TRIM**

TYPE		SIZE	PIECES PER CARTON
	Bullnose S-44K9M	4" × 20"	10
	Cove Base S-36E9T	6" × 13"	30
	Outcorner SC-36E9T	I"×6"	15

^{**} Available in Veranda Solids only.

SHADE VARIATION



HIGH (V3)
Color variation from tile to tile, and within each tile.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION		
3/8"	1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern where the overlap does not exceed 33%)		

SLIP RESISTANCE (WET): 3

The higher the rating, the higher the slip resistance.

I < .50			
2 .5059			
3 ≥ .60			

TEST RESULTS 🕹

	ASTM#	RESULT
Water Absorption	C373	<0.5%
Breaking Strength	C648	>500 lbs
Scratch Hardness	MOHS	8.5
Chemical Resistance	C650	Resistant
Coefficient of Friction	C1028	Wet: ≥0.60 Dry: ≥0.80

NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: www.daltile.com/ CommercialFactors

Water, oil, grease etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on

COLORBODY™ PORCELAIN

VERANDA™ SOLIDS & TONES



floor • wall • countertop



By their very design, Daltile products can help make it easier for you to earn LEED $^{\text{TM}}$ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.











