

8214H


4" Compact Fluorescent Housing



Royal Pacific Ltd.

4931 Paseo Del Norte NE
Albuquerque, NM 87113
Ph: 1-800-937-6925
Fax: 1-888-207-9509

COMPACT FLUORESCENT HOUSING

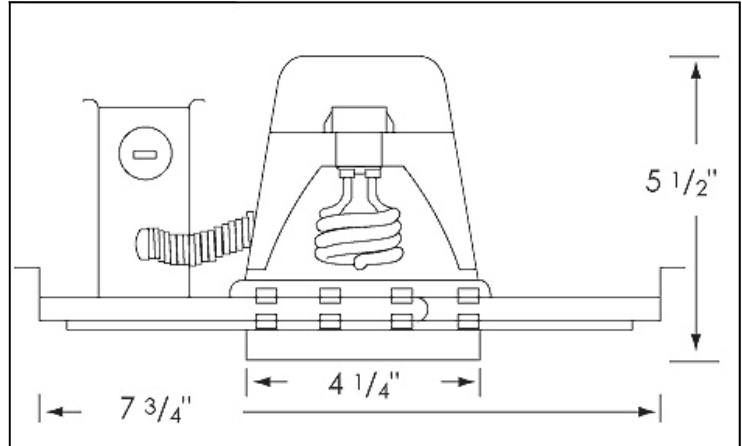

GENERAL DESCRIPTION

Compact fluorescent 4" line voltage housing

MAIN FEATURES

Standards Conformance

- IC rated for direct contact with Non-Cellulose type insulation.
- Thermally protected against misuse of improper lamping.

Listing

- Energy Star qualified.
- ETL & cETL listed for damp location and feed through wiring.
- Meets Washington State energy code for restricted airflow requirements.

Voltage

- 120V

Lamps

- 13W, GU24
- 18W, GU24

Junction Box

- Listed for through-branch circuit wiring (4 in-4 out) and eight 1/2" knockouts.

Bar Hangers

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span.
- Bar hangers can be turned 90° on the plaster frame.
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers.

Fit

- Adjusts to accommodate up to 1" ceiling thickness.
- 5 1/2" height allows use in 2" x 6" joist construction.
- Adjustable socket bracket plate for proper positioning of different lamp types.

Project:
Contact:
Location:
Fixture Type:

Quantity	Remarks