
Installation manual for: L41.5" W8" H9" L5 Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P3) in side of top unit the mounting bracket.
- 6.Place the top suction plate(P4) on the hanging plate (P1) and Nut(P5) tightly.
- 7.Install E26 light source, no include bulb.
- 8. Place the glass cover (P14) on the semicircular cover (P10).

The end!

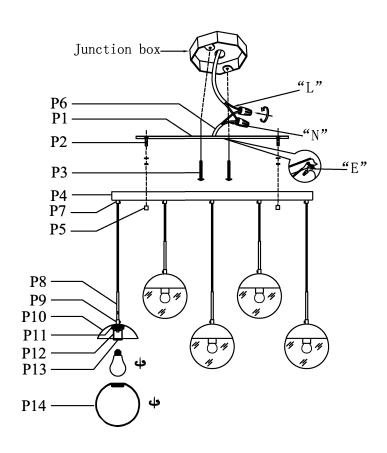

PARTS LIST

part	picture	Description	Qty	Check	list
P1	<u>• • • • • • • • • • • • • • • • • • • </u>	L26" Mounting bracket	1		
P2		Nipple	2		
P3	-	5/32-32 Screw	2		
P4		L36"W4.75"H1.5" Canopy plat	1		
P5		Nut	2		
P6	~	Power Cord 1' Black	1		
P7		Car iron parts	5		
P8		L5. 24"Tube	5		
P9		Coupling	5		
P10		D7.28" Semicircular cover	5		
P11		D2.16" Screw die	5		
P12		Socket cover	5		
P13	4	E26 Socket	5		
P14	\odot	D8" Clear Glass	5		

L'' = Hot wire

"N" = Neutral wire

"E" = Ground wire