















Installation manual for: L41.5" W8" H9" L5


Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P3) in side of top unit the mounting bracket.
6. Place the top suction plate(P4) on the hanging plate (P1) and Nut(P5) tightly.
7. Install E26 light source, no include bulb.
8. Place the glass cover (P14) on the semicircular cover (P10).

The end!

PARTS LIST

part	picture	Description	Qty	Check list
P1		L26" Mounting bracket	1	
P2		Nipple	2	
P3		5/32-32 Screw	2	
P4		L36" W4.75" H1.5" Canopy plat	1	
P5		Nut	2	
P6		Power Cord 1' Black	1	
P7		Car iron parts	5	
P8		L5.24" Tube	5	
P9		Coupling	5	
P10		D7.28" Semicircular cover	5	
P11		D2.16" Screw die	5	
P12		Socket cover	5	
P13		E26 Socket	5	
P14		D8" Milk Glass	5	

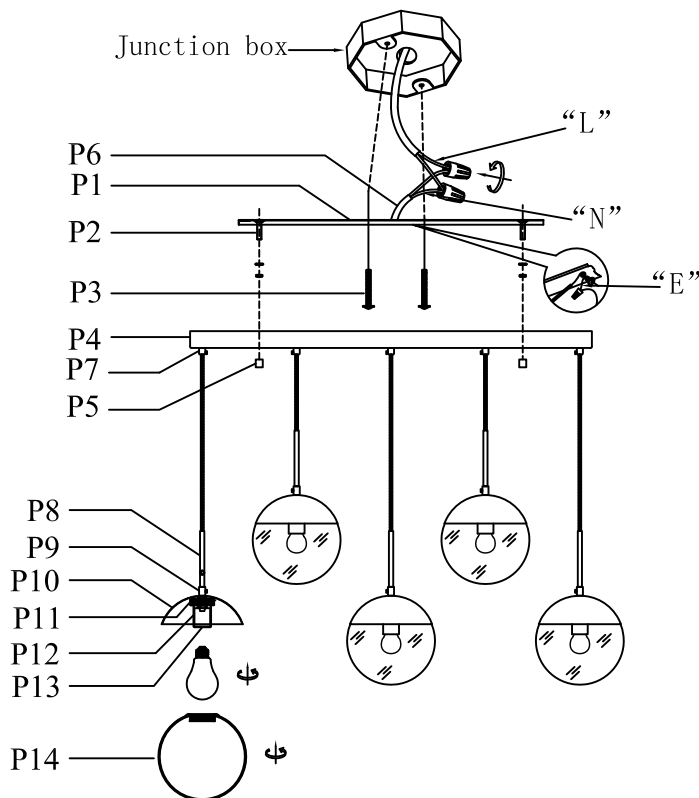

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire