


LEXINGTON GLAZED EXTERNAL DOOR

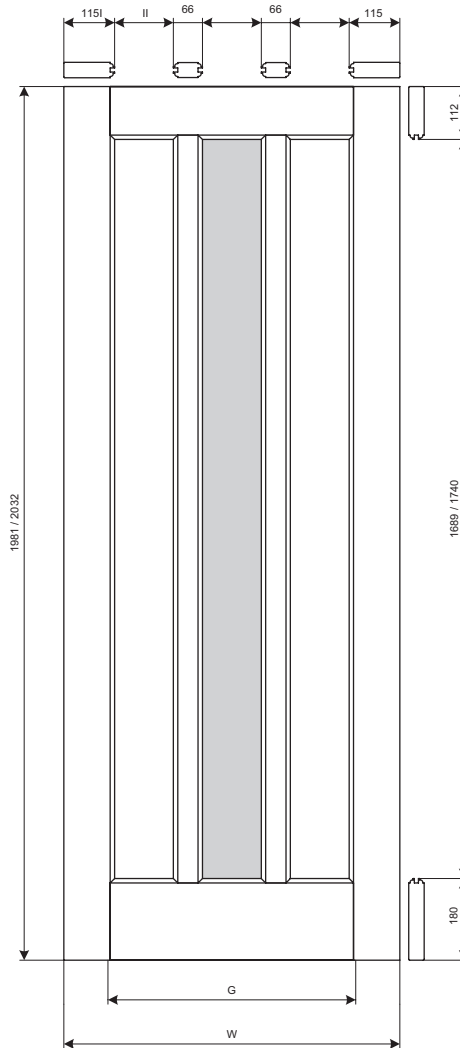

SPECIFICATIONS

Veneer Species:

American white oak

Veneer Thickness:

1.2mm

Edge Lippings:

15mm American white oak

Top & Bottom Lippings:

15mm American white oak

Panel Thickness:

20mm treated laminated pine

Moulding Size & Profile:

16mm Ovolo

Stile & Rail Core:

Treated laminated pine

Construction:

Tongue & groove joint with dowel and glue

Glazing:

14mm double etched with paint & peel film

Packaging:

Shrinkwrap with plastic edge corner protectors.

Branded cardboard corner sleeves to each long edge.

A4 paper fitting instruction



10 year guarantee
against manufacturing
defects



10 year guarantee
against double/triple
glazing unit failure

