


INSTALLATION AND SAFETY INSTRUCTION FOR HANGING FIXTURE

CAUTION! SHUT POWER OFF AT MAIN CIRCUIT BREAKER BEFORE INSTALLATION.


MOUNTING THE FIXTURE(FIG.1)

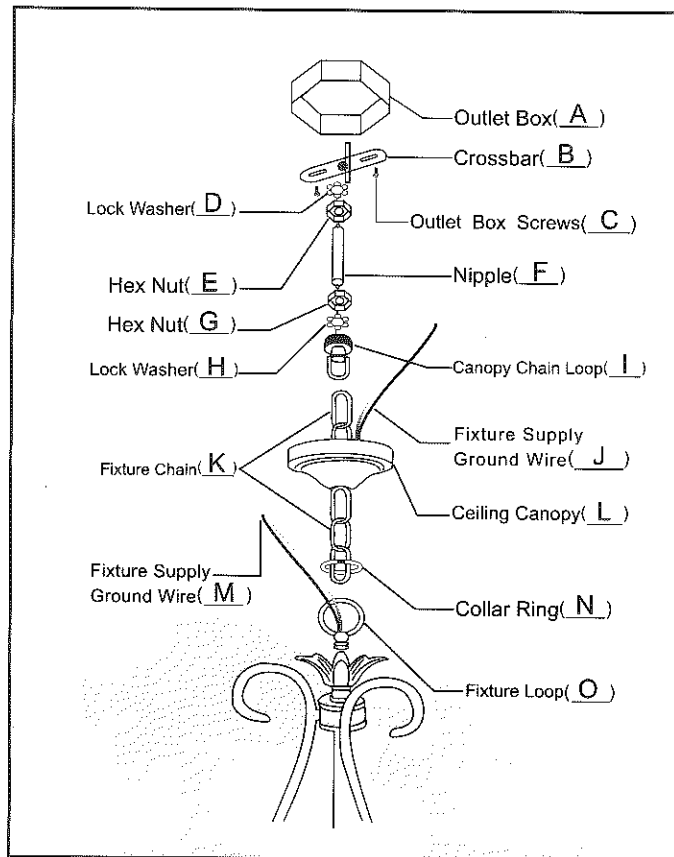

1. Turn electricity off at main circuit breaker.
2. Fasten the Crossbar(B) to the Outlet Box(A) with(Two) Outlet Box Screws(Shown as C. Not Furnished) & "GND" on side of Crossbar (B) should be faced out.
3. Proceed with threaded Hex Nut(E) and Lock Washer(D) over the top end of Nipple(F). Thread Nipple(F) through Crossbar(B). Tighten Hex Nut(E) against Crossbar(B) with pliers until snug. Thread Hex Nut(G) over bottom of Nipple(F). Slip Hex Nut(G) on bottom of Nipple(F) then thread Canopy Chain Loop(I) to bottom of Nipple(F). Tighten Hex Nut(G) against Canopy Chain Loop(I) with pliers until snug
4. Open one end link of the Chain(K) then connect it to the Fixture Loop(O). Close the link. Determine proper hanging height of fixture the discard remaining Chain(K).
5. Pass Fixture Wire(M) through every other link of Chain(K) then through Collar Ring(N) and Ceiling Canopy(L). Slip Collar Ring(N) and Ceiling Canopy(L) over Chain(K).
6. Open top link of Chain(K) and connect to Canopy Chain Loop(I) and close link.
7. Thread Fixture Wire(M) through Canopy Chain Loop(I) and Nipple(F) up into Outlet Box(A) trim wires leaving approx. 6" for connections (use Connecting The Wire instructions).
8. After all connections are made push the Ceiling Canopy(L) over Outlet Box(A) making sure all wires are tucked into Outlet Box. Secure Ceiling Canopy(L) by threading Collar Ring(N) onto the Canopy Chain Loop(I) until snug to Ceiling Canopy(L)..
9. Install bulbs following close attention to maximum wattage.
10. Turn electricity back on at main circuit breaker.

IN

CONNECTING THE WIRE (See Wiring Diagram)

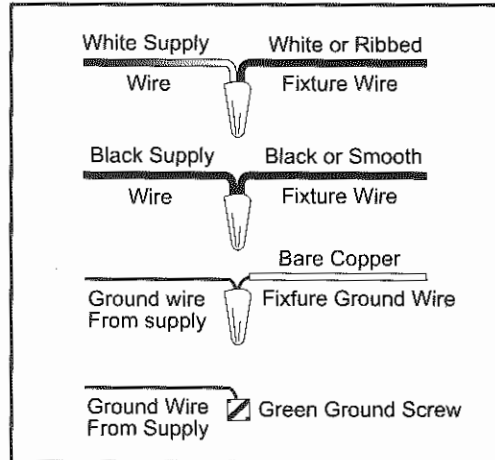

1. Connect your grounding wire (Green or Bare copper) from Fixture to grounding wire on outlet box or to the green ground screw on the crossbar.
2. Connect the House White Wire to the Fixture Supply Wire (White or Ribbed).
3. Connect House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth).
4. Tuck the wires into outlet box carefully.

CONSULT A QUALIFIED ELECTRICIAN IF YOU HAVE ANY QUESTION



STRUCTIONS DE SECURITE ET D'INSTALLATION POUR LA MEUBLE D'ACCROCHAGE

PRECAUTION ! ETEINDRE LA PUISSANCE AU DISJONCTEUR DU CIRCUIT PRINCIPAL AVANT L'INSTALLATION

MONTER LA FIXATION (FIGURE 1)

