

The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.

SKU NAMING CONVENTION						
SKU#	AQ-XX-XXX (Model+Finish+Blade Type)					
Finishes	Brushed Nickel - BN Polished Chrome - CR Textured Bronze - TB					
Blade Type	Solid Wood - <b>WD</b> Metal w/ Decorative Cage - <b>MTL</b> Metal w/ Safety Cage - <b>MSAF</b>					

## STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 29°

3-speed RF remote control in black



## **ACCESSORY**

Decora-style, 3-speed, Lutron SFSQ-LF non-dimmable wall control




CEILING HEIGHT / DOWNROD TABLE					
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded				
10 ft or less	5 inches / 13 cm Use safety cages if applicable				
10 -12 feet	10 inches / 25 cm				
13 feet	20 inches / 51 cm				
14 feet	30 inches / 76 cm				
15 feet	48 inches / 122 cm				
16 feet +	72 inches / 183 cm				

CEILING PITCH TABLE					
0/12	0 degrees				
1/12	4.76 degrees				
2/12	9.46 degrees				
3/12	14.04 degrees				
4/12	18.43 degrees				
5/12	22.62 degrees				
6/12	26.57 degrees				
7/12	30.26 degrees				
8/12	33.69 degrees				
9/12	36.87 degrees				
10/12	39.81 degrees				
11/12	42.51 degrees				



Matthews Fan Company 1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com Acqua

## TECHNICAL SPECIFICATIONS

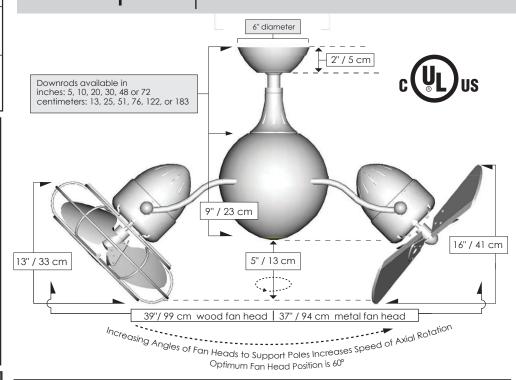

FAN SPECIFICATIONS							
Fan Head Options	Mahogany Tone Solid Wood	Metal with guard					
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm					
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm					
Guard Options		Safety Cage Decorative Cage					
RPM	1431	1445					
CFM	4057.84	3167.02					
Watts	101.25	80.50					
CFM/Watt	40.80	39.34					
Blade Pitch	19°	31°					
Motor Type	AC						
	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183						
Downrods Lengths Field cuttable. Non-threaded							
Field cuttable. Non-threaded	centimeters: 13, 25, 51,	76,122,183					
Field cuttable. Non-threaded  Downrod Diameter	centimeters: 13, 25, 51, 1 inch	76,122,183					
Field cuttable. Non-threaded  Downrod Diameter  Overall Drop	centimeters: 13, 25, 51, 1 inch 12 inches / 30 cm + dov	76,122,183					
Field cuttable. Non-threaded  Downrod Diameter  Overall Drop  Fan Weight	centimeters: 13, 25, 51, 1 inch 12 inches / 30 cm + dov 27 lbs	76,122,183 wnrod length					
Field cuttable. Non-threaded  Downrod Diameter  Overall Drop  Fan Weight  Voltage	centimeters: 13, 25, 51, 1 inch 12 inches / 30 cm + dov 27 lbs 110 or 220	76,122,183 wnrod length ntable 3-speed					
Field cuttable. Non-threaded  Downrod Diameter  Overall Drop  Fan Weight  Voltage  Remote Control	centimeters: 13, 25, 51,  1 inch  12 inches / 30 cm + dov  27 lbs  110 or 220  Hand-held & wall-mour  Lutron decora-style wa  Damp locations for all f	76,122,183 wnrod length ntable 3-speed Il control: SFSQ-LF					
Field cuttable. Non-threaded Downrod Diameter Overall Drop Fan Weight Voltage Remote Control Wall Control	centimeters: 13, 25, 51,  1 inch  12 inches / 30 cm + dov  27 lbs  110 or 220  Hand-held & wall-mour  Lutron decora-style wa  Damp locations for all f	76,122,183  wnrod length  ntable 3-speed  Il control: SFSQ-LF  rinishes					
Field cuttable. Non-threaded Downrod Diameter Overall Drop Fan Weight Voltage Remote Control Wall Control Environment	centimeters: 13, 25, 51, 1 inch 12 inches / 30 cm + dov 27 lbs 110 or 220 Hand-held & wall-mour Lutron decora-style wa Damp locations for all f Neither coastal, saltwa	76,122,183  wnrod length  ntable 3-speed  Il control: SFSQ-LF  rinishes					

LIGHT KIT PHOTOMETRICS									
Lamping (Replaceable)	Remote Dimmable	Termperature	Delivered Lumens	CRI	Watts	Hours			
GU10 LED	No	2969 K	337.30	94.0	5	36,000			