



Design by Estudi Ribaudí

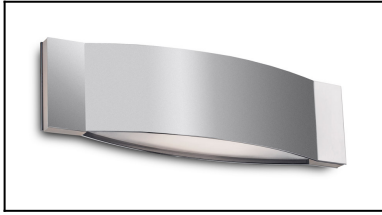

The photograph may not match the reference exactly. Please read the product description to identify the finish.

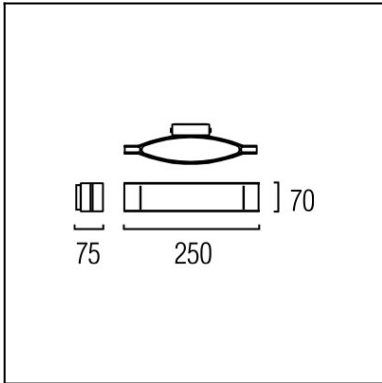


TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	1 x R7s MAX 150W Maximum lamp length: 118.00 mm
Bulb included:	1 x R7s 120W
Total power consumption (W):	150
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	6
Net Weight (Kg):	1.25
EAN:	8435111040836



Download photometric file .ldt / .ies

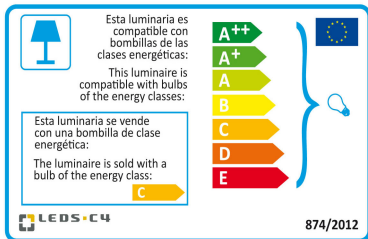

Click on image to download energy label


MATERIALS / FINISHES

Structure	Steel	Diffuser material:	Glass
material:		Diffuser finish:	Tinted
Structure finish:	Grey		

Luminaire			Measurem.			Lamp		
Code	05-2397-21-E9		Code	05-2397-21-E9		Code	150T3 Q/CL/CP 230V	
Name	Aplique 150W R7s difusor opal		Name	Aplique 150W R7s difusor opal		Number	1	
Line	Eulumdat		Date	16-03-2010		Position		
Efficiency			57.26%		Coordinate system	CG	Total Flux	2400.00 lm
Maximum value			391.70 cd		Position	C=0.00 G=145.00	Double Symmetrical	
Rectangular Luminaire			Length	60 mm	Width	270 mm	Height	70 mm
Rectangular Luminous Area			Length	60 mm	Width	270 mm	Height	70 mm
Horizontal Luminous Area			0.016200 m2		Emitting area on Plane 180°		0.004200 m2	
Emitting area on Plane 0°			0.004200 m2		Emitting area on Plane 270°		0.018900 m2	
Emitting area on Plane 90°			0.018900 m2		Glare area at 76°		0.007994 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		180	
Measurement Distance			0.00		Measurement Flux		2400.00 lm	
Operator			Asselum		Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	150T3 Q/CL/CP 230V	150T3 Q/CL/CP 230V - 150.00 W	2400.00	150.00	1	
C.I.E.	47 79 96 24 57	D DIN 5040				
F UTE	0.14 E + 0.43 T	B NBN				
		D33				
		BZ 4				


60mm x 270mm






C Halfplanes


180.0 — 0.0
270.0 — 90.0

ULOR 43.30 %
DLOR 13.95 %
RN 75.63 %

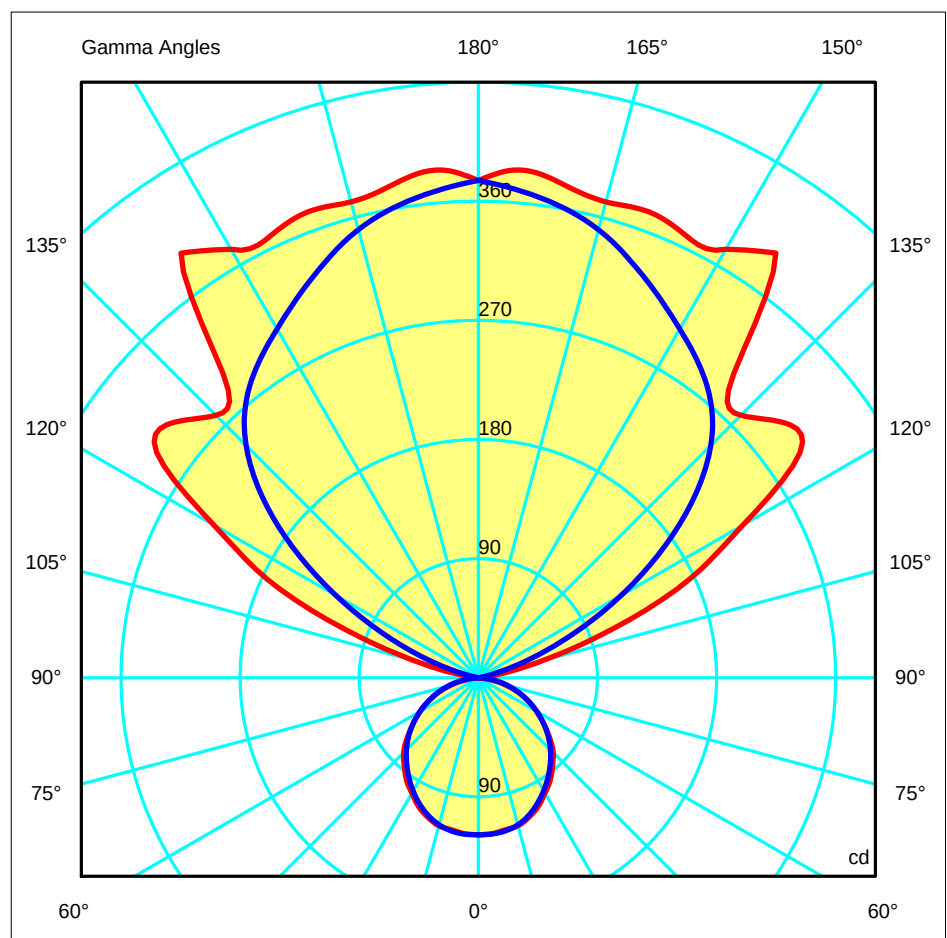


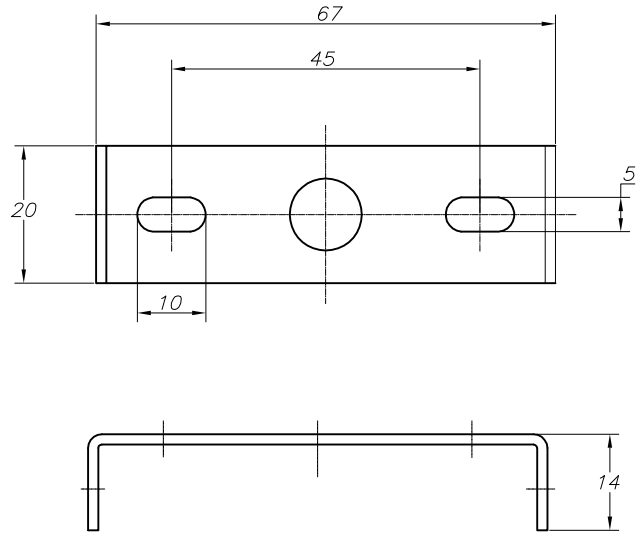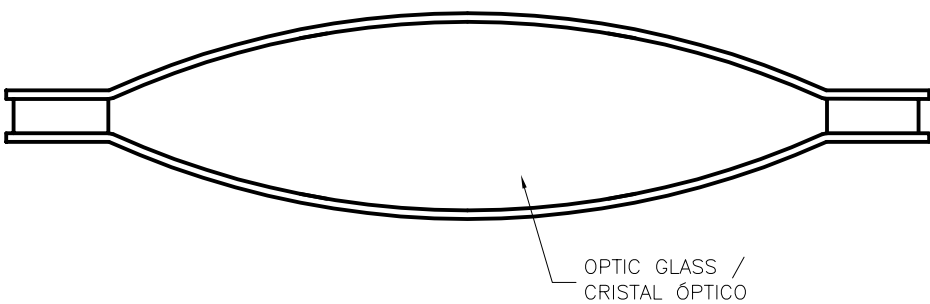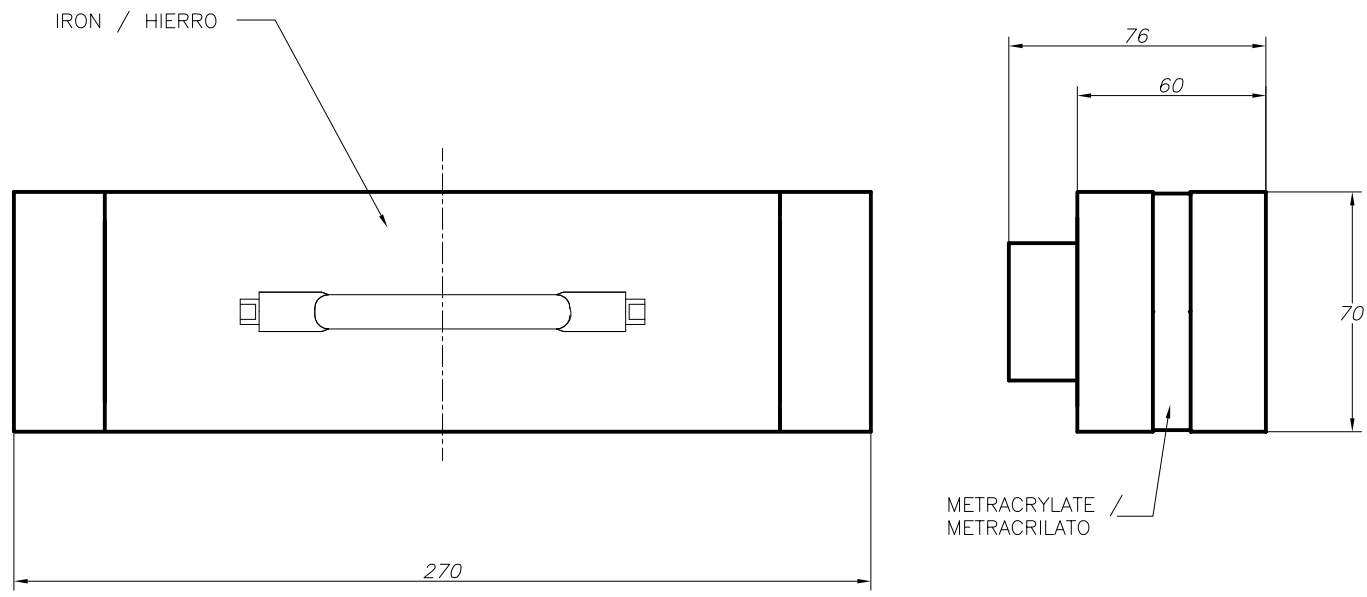


1

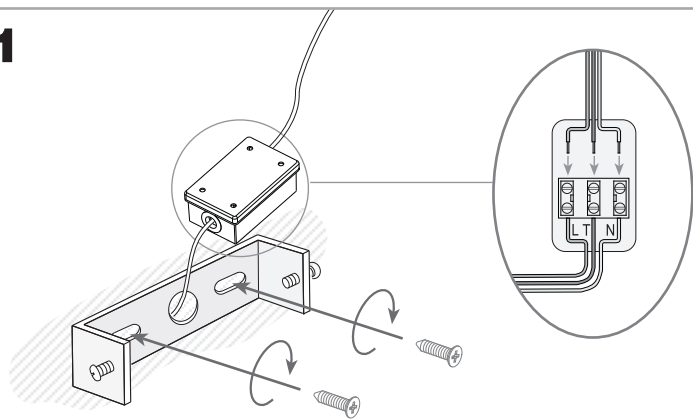


2

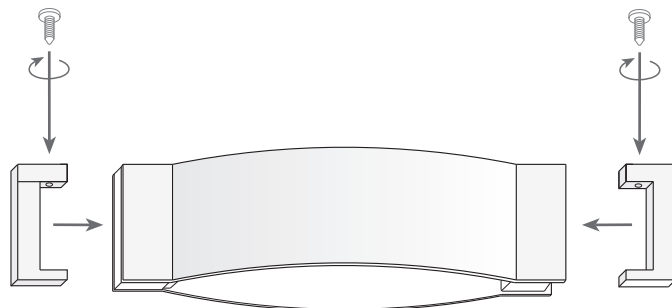


3

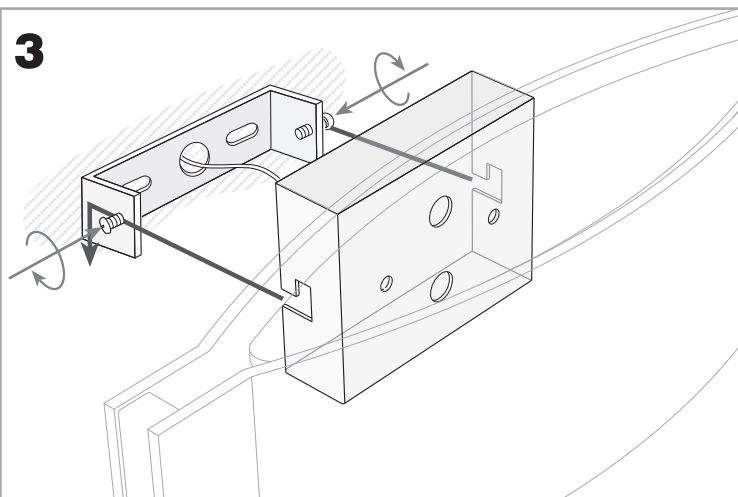


4

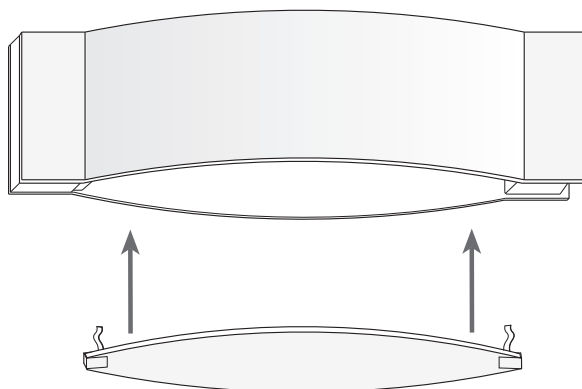

5

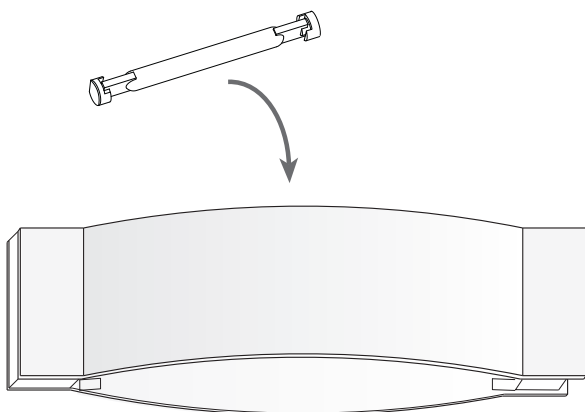

7



6

