

INSTALLATION INSTRUCTIONS

For Model# N6228 (Rev. 04/16/2015)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1 & 2 & 3)

1. Shut off power at the circuit breaker and remove old fixture from ceiling.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. In the Housing (J), connect white wires to white wires, connect black wires to black wires as shown in Fig. 2. Pull Safety Cable, Fixture Wires and Fixture Ground Wire into the center pipe (E) of fixture.
4. Place Arm Assembly (F) onto Housing (H), then screw them using two pieces of Cap Nuts (D).
5. In the Housing (I), connect white wires to white wires, connect black wires to black wires as shown in Fig. 3. Pull Safety Cable, Fixture Wire and Fixture Ground Wire into the Pipe (E).
6. Fix Pipe (E) to Housing (I).
7. Place Light Cluster (C) onto Housing (I) over Pipe (E), then screw them tightly using two pieces of Cap Nuts (D).
8. Screw Nut (B) and Coupling (A) onto Pipe (E) tightly.

HANGING THE FIXTURE (Fig. 4)

Shut off power at the circuit breaker and remove old fixture including the crossbar.
IMPORTANT: For a safe and secure installation, these fixtures must be installed by means of support that is independent of the outlet box.
SUGGESTED INSTALLATION:






9. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
10. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the ring to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three nuts, as shown.
11. Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of chain and lift the fixture to attach to the ceiling loop and secure the link.
12. Lace the fixture wires, ground and safety cable through the chain and loop, exiting through the side of hickey and pull until taut. Run cable through the top of the outlet box and secure to structural member.

CONNECTING THE WIRES (Fig. 5)

13. At this point, connect the electrical wire as shown in figure 5, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the junction box using the Green Screw provided.
14. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar and thread onto ceiling Loop protruding through canopy.
15. Hang Bottom Font (H) onto fixture body with two loops.
16. Hang Large Decorative Glasses (L) and Small Decorative Glasses (S) onto leafs of arms as shown in Fig. 1.
17. Install the light bulbs in accordance with the fixture's specifications. (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

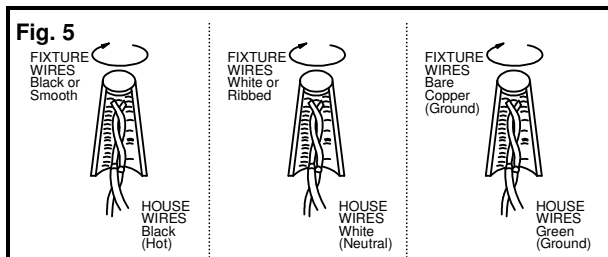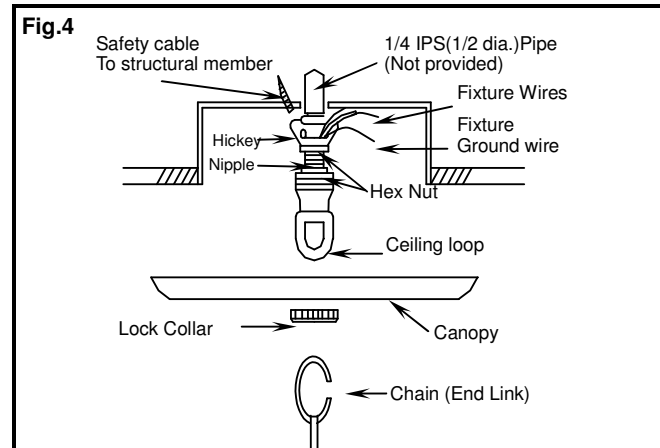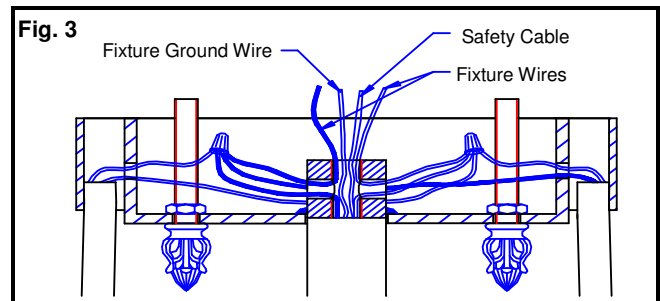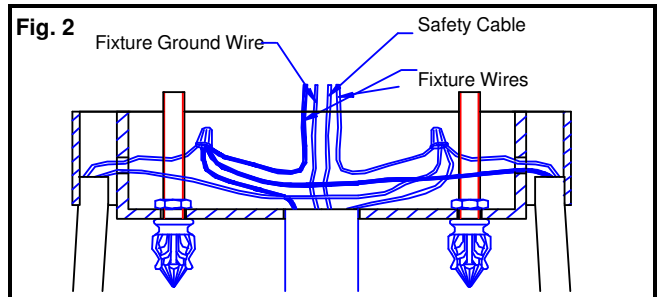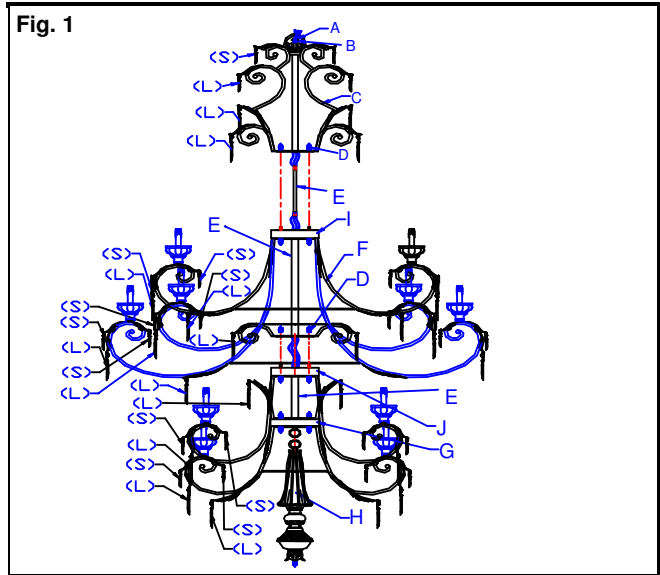

LA-710E



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.