





Frame

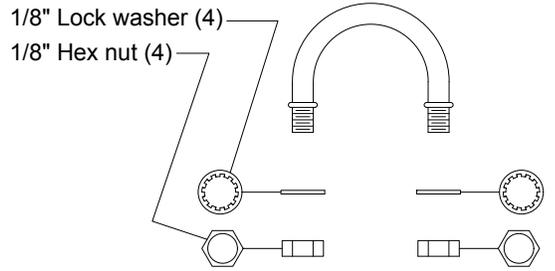


U-Loop assembly (2)



Mounting strap (1)

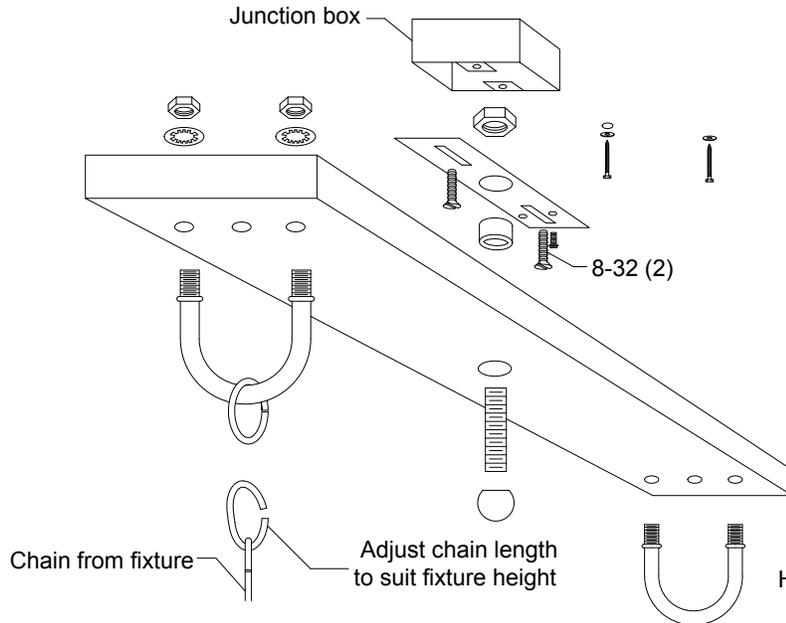

Variable Length Chain (2)



1/4" Threaded nipple assembly (1)

Mounting Instruction for Small Pot Racks:

1. Disconnect power at main electrical box before installing fixture.
2. Break one chain from each chain length and put one chain link on each U-loop.
3. Mount both U-loops to the decorative mounting canopy with the 3/8" hex nut and lock washers provided. Make sure there is one chain link on each U-loop before mounting them.
4. Thread the nipple 1/4" through the mounting strap and use the hex nut to lock into place. Before you tighten the hex nut slide the canopy over the nipple to make sure you have enough room to mount the heavy duty ball on the bottom of the canopy (about 1/2").
5. Attach the mounting strap to the junction box with the (2) 8/32 screws or larger. The junction box and mounting strap must be reinforced.
6. Measure the height you want the fixtures to hang off your table and adjust chain accordingly.
7. Connect the black outlet wire (hot) to the smooth fixture wires with a wire nut. Connect the white outlet wire (neutral) to the ribbed fixture wires. Connect the ground wire from the fixture to the green ground screw on the mounting or connect fixture ground to the junction box ground wire. You must have a ground running to your junction box as well.
8. Connect Aircraft cable from fixture to adequate structural support. Do not attach to junction box.
9. Slide the decorative mounting canopy over nipple and outlet box and screw the heavy duty ball on the nipple to hold the canopy and fixture in place.



**HI-LITE MFG.
CO., INC**


13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

**H-78Y,H-88Y,H-10Y,H-12Y,H-11Y,H-24Y,H-22Y,32Y,H-34Y,H-13Y,H-77Y,H-42-Y,
H-44Y,H-52Y,H-60Y,H-64Y,H-71Y,H-72-Y,H-82Y,H-90Y,H-91Y,H-92Y,H-93Y,H-76Y**

**Pot Rack Support (Small)
Assembly Diagram**

Canopy Mounting and Connection


1. Disconnect power at main electrical box before installing fixture.
2. Fasten outlet box screw through slots in mounting strap to outlet box.
3. Attach nipple to mounting strap.
4. Connect black outlet wire to black fixture wire with wire nut, connect white outlet wire to white fixture wire with wire nut and attach ground wire to ground screw provided on strap.
5. Slide canopy over nipple and outlet box and secure canopy with round ball.

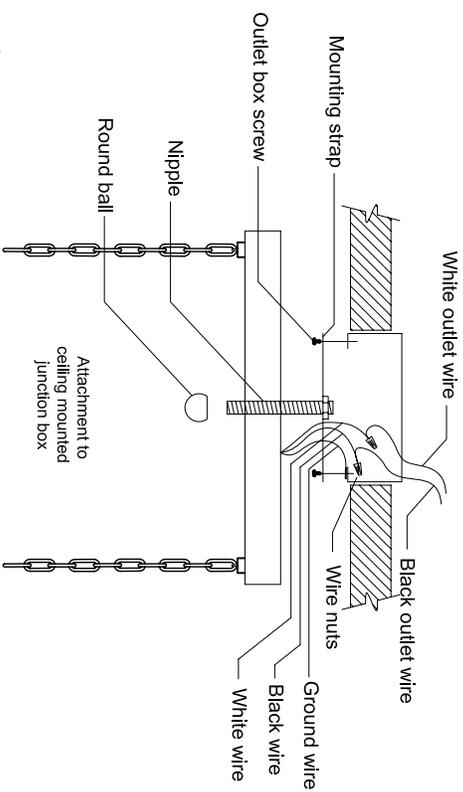


(2 places each end of fixture.)

Knurled end cap is snugged onto bolt end.
Nut goes over bolt and is snugged to down light assembly.

This bolt is already in place in fixture and goes through hole in down light assembly.

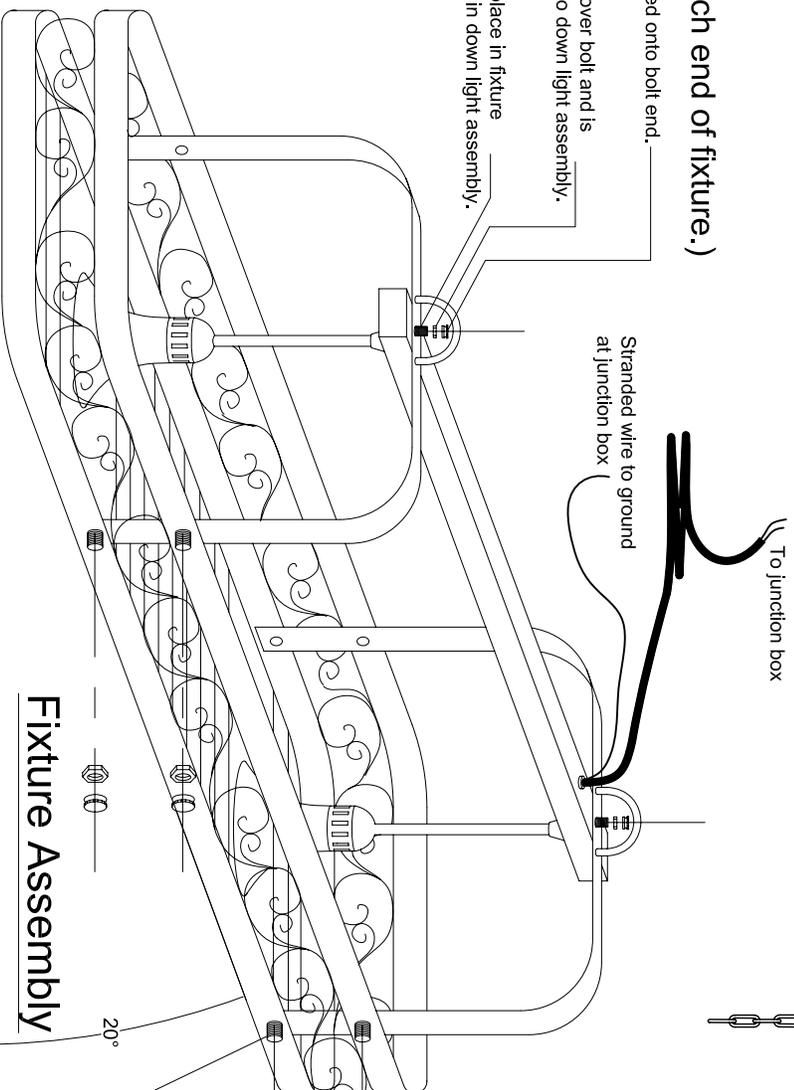

Basic Assembly Pieces

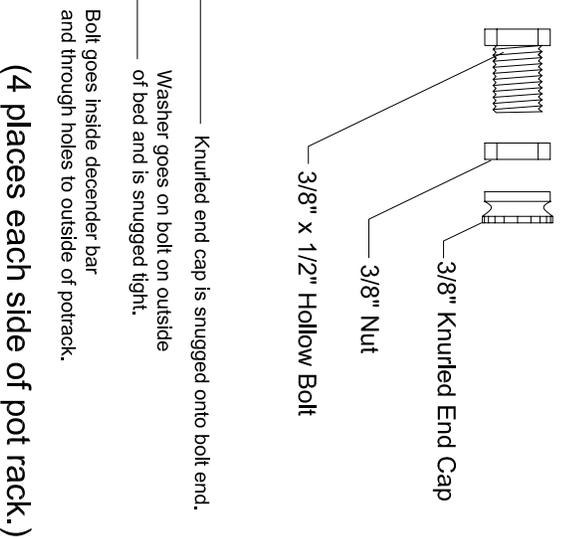

Hi-Lite Manufacturing Co., Inc.

13450 Monte Vista Avenue Chino, CA
 Phone (909) 465-1999 Fax (909) 465-0907
 hlitemfg@earthlink.net www.hlitemfg.com

H-72Y, H-60Y, H-62Y Pot Rack Assembly